


Work with failure reasons

The Smart Reporting feature automatically categorizes your executions under primary status and secondary failure reasons, as shown in the following figure.



The primary status can be **Passed**, **Failed**, **Blocked**, or **Unknown**. Failure reasons give you more detailed reasoning about the failure cause. Clicking one of the primary status figures adds the secondary distribution of failure reasons, as seen below.

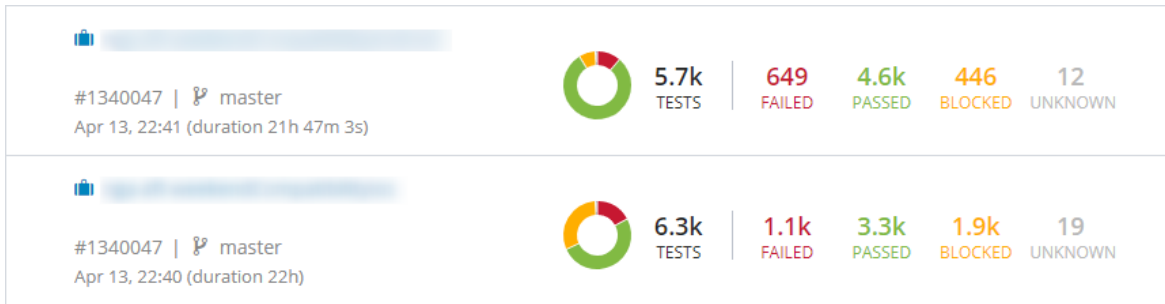

The list is sorted by quantity, so you can easily review and handle the main reasons for your failures.

Note that there are different failures reasons under **Failed** and under **Blocked**.

Clicking a specific failure reason filters the report list to only include this failure reasons. In the below examples, clicking:

- **FAILED > APPLICATION CRASHED** filters all single test execution reports (STR) that failed due to an application crash automatic failure reason.
- **POPUP HANDLING** filters the execution reports to only show failures likely caused by an unexpected popup.
- **BLOCKED > INSTALL APP FAILURE** filters execution reports that failed due to an install app failure.

